
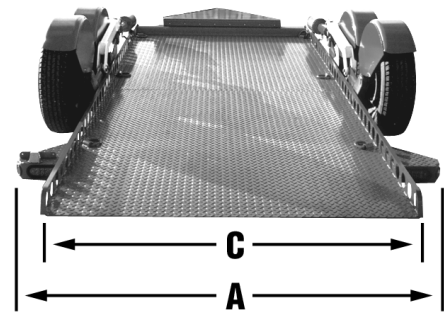


Dimensions and Loads

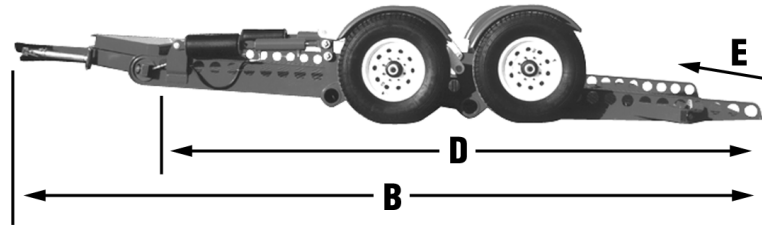

Dimensions:

- A = 8' 6" (102")
- B = 22' 1" (265.0")
- C = 6' 2" (74")
- D = 16' (192")
- E = 4 Degree Load Angle
- Clearance of deck at transport height = 11"

Loads:

- 425 lbs Tongue Load (Trailer)
- 1075 lbs Tongue Load (Cargo)
- 1500 lbs Total Tongue Load
- 768 lbs Wheel Load (Trailer)
- 2232 lbs Wheel Load (Cargo)
- 3000 lbs Total Wheel Load
- Two (2), 6000 lb Axles

Specifications and Features *(Base Trailer)*

- Ground to Travel Height
- GVWR 13500 lbs
- Payload Maximum 10000 lbs
- Trailer Weight 3500 lbs
- 3 to 1 Payload to Trailer Weight Ratio
- Tires ST235/80R16LRE (3520 lbs Capacity Each)
- Cylinders 3-1/2" Diameter x 12" Stroke
- Adjustable Ball Hitch 2-5/16" Diameter
- Ramp Built-in
- Larger Lockable Storage Compartment
- Controlled Descent
- Tie Down Rail Built-in

- DC Electric/Hydraulic Pump
- Tongue Jack
- Six (6) "D" Rings
- Breakaway Kit with Chains
- Electric Brakes Both Axles
- LED Lighting with 7 Pin Connector
- Single Pin Grounded 12 VDC Power Cable
- Control Switch with Cable
- HSLA Steel Construction (No Angle or Channel Iron)
- Grade 55 - 3/16" Diamond Plate Flooring
- Combination Hydraulic/Rubber Suspension

Options

- On Board Power – includes Battery, Charger & Maintainer 12784
- Cargo Winch 8000# 12785
- Pintle Hitch (2-1/2" Lunette) 12782
- Remote Power Option 12783
(Cord in addition to On Board Power)

- Spare Tire, Wheel & Carrier 12544
- Special Paint 12789
(Dk Navy Blue is Standard)